


# Hall Current Sensor

# EHN Series-T01

The EHN1000~3000A series are For the electronic measurement of currents:DC,AC,pulsed, with a galvanic isolation between the primary(high power) circuit and the secondary(electronic) circuit.

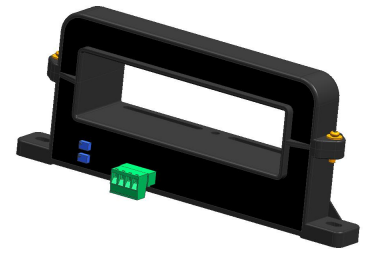


## Electrical Specifications

| Type  |              | EHN 102-T01   | EHN 202-T01     | EHN 302-T01     |
|---|--------------|---|-----------------|-----------------|
| Primary nominal DC. current                                       | $I_{pn}$ (A) | 1000  | 2000            | 3000            |
| Primary current measuring range                                   | $I_p$ (A)    | DC≤1200 AC≤1000                                     | DC≤2400 AC≤1800 | DC≤3600 AC≤2600 |
| Accuracy TA = 25 °C (excluding offset)                            | X            | ±0.5 % of $I_{PN}$                                  |                 |                 |
| Linearity (excluding offset)                                      | L            | ±0.2% % of $I_{PN}$                                 |                 |                 |
| Overload capability ( $I_{max}$ )                                 | $I_p$        | 18000A (The 18000A does not guarantee the accuracy) |                 |                 |
| Output current  | $I_{out}$    | ± 0.02 A  |                 |                 |
| Offset current @ TA = 25 °C                                       | $I_o$        | < ± 0.1mA   |                 |                 |
| Hysteresis offset current @ IP = 0, after an excursion of 1 × IPN | $I_{oh}$     | < ± 0.1 mA  |                 |                 |
| Power Consumption   | $I_c$        | 0.15 A  |                 |                 |
| Supply voltage  | Vcc          | 12V   |                 |                 |
| Temperature coefficient of $I_{out}$ (% of reading)               |              | < ±0.1 %/K  |                 |                 |
| Isolation voltage   | Vd           | 4.4 KV RMS/50Hz/min,                                |                 |                 |
| Impulse withstand voltage 1.2/50 μs                               | Uw           | 8.3 kV  |                 |                 |
| Isolation resistance  | RIs          | DC500V / 1000MΩ min                                 |                 |                 |
| Step response time to 90 % of IPN                                 | Tr           | < 5 μs  |                 |                 |
| Frequency bandwidth (0 ... -3 dB)                                 | f            | DC ... 25 kHz                                       |                 |                 |
| Operating temperature   | To           | -35 ~ +80°C   |                 |                 |
| Storage temperature   | Ts           | -40C ~ +85°C  |                 |                 |


## Mechanical Specifications

|                |                       |
|----------------|-----------------------|
| Output Type    | Current(2EDG 5.08-4P) |
| Approx. Weight | 860g                  |

**Dimensions (unit: mm):**

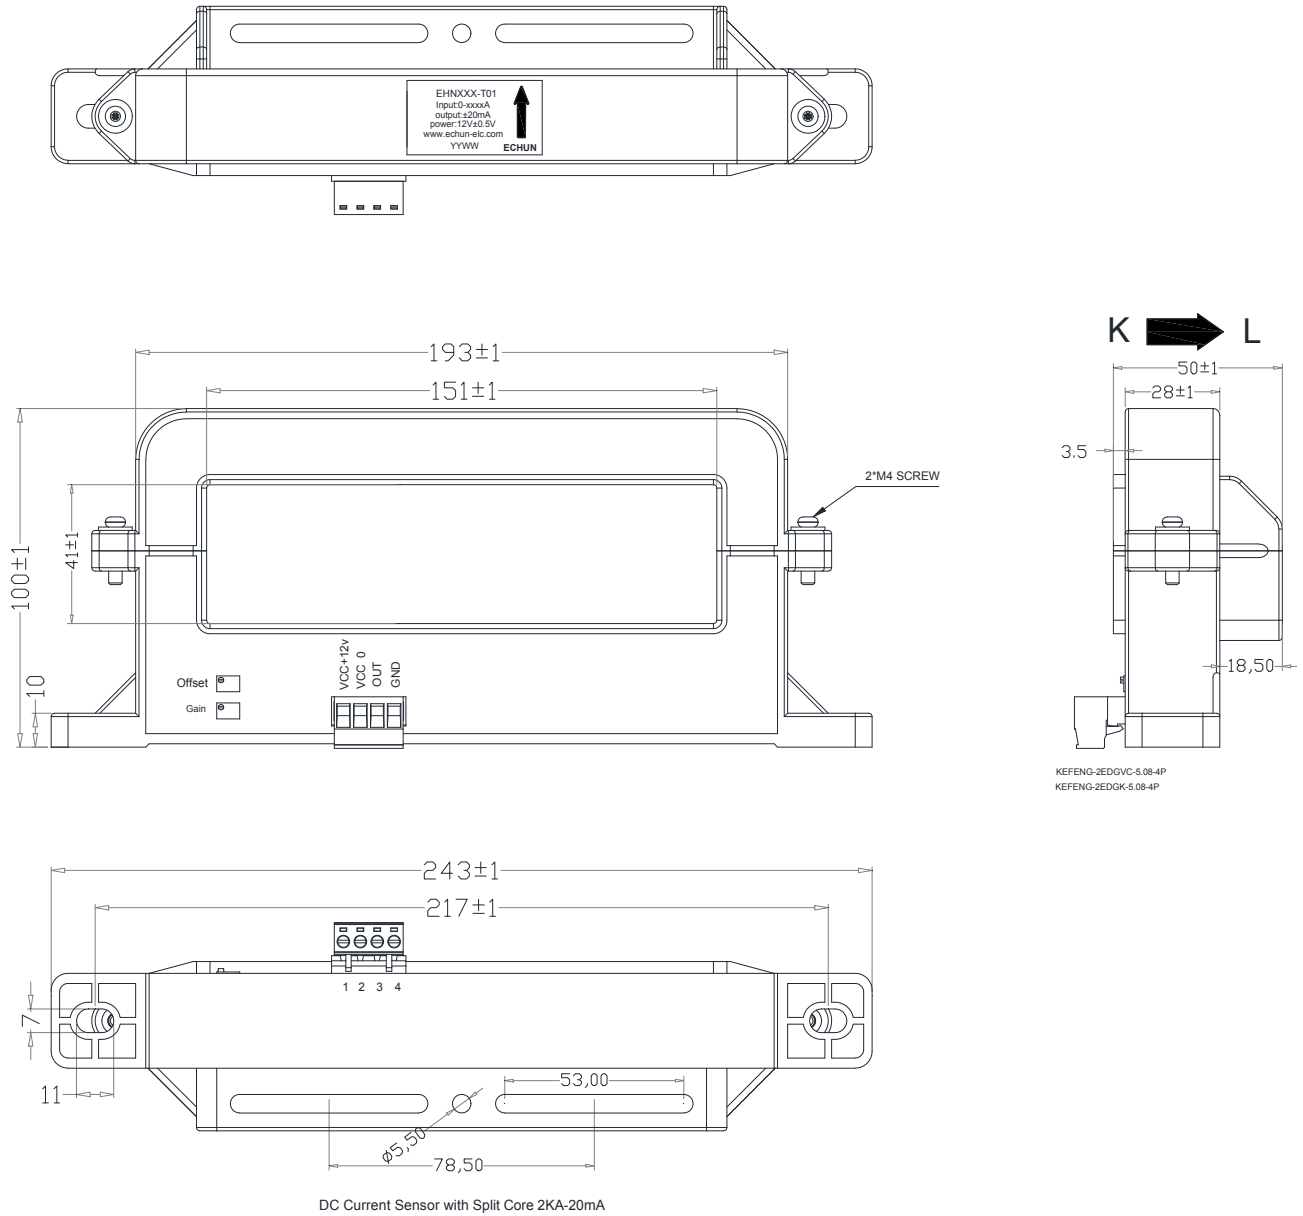

**Connection:**

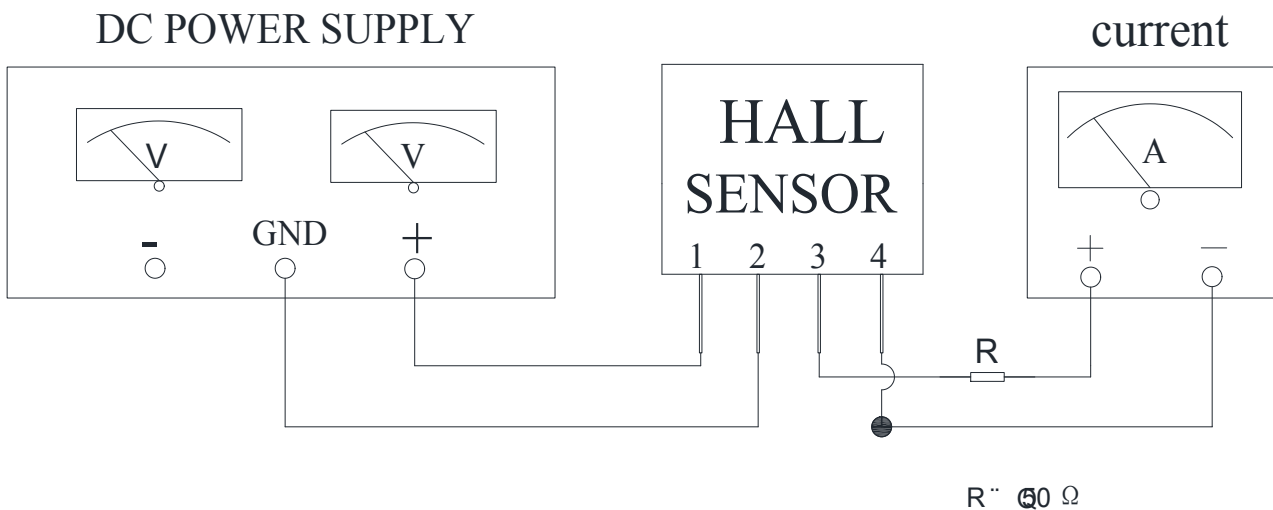

Notes:

1. Adjust the offset potentiometer to power it on for 3 minutes.
2. Two potentiometers can be adjusted, only if necessary, by turning slowly to the required accuracy with a small screwdriver.
3. Connect the terminals of power source, output respectively and correctly, never make wrong connection.
4. The best accuracy can be achieved when the window is fully filled with bus-bar (current carrying conductor).
5. The in-phase output can be obtained when the direction of current of current carrying conductor is the same as the direction of arrow marked on the transducer case.
6. The BUSBAR must be installed in the center of the window!
7. The OFFSET Used to adjust the zero point ( $I_p = 0$ ), usually the output value  $< 0.03\text{mA}$ .
8. The GAIN Adjust the output current value (accuracy adjustment).