


The ECO15 series are mini-precision current transformers.
The CT is Small size and low cost

Electrical Specifications

| MODEL | INPUT CURRENT | AVAILABLE OUTPUT |
|----------|---------------|--|
| ECO15-30 | 30A | CURRENT OUTPUTS @ 10mA, 20mA, 30mA, 40mA , 50mA, 70mA (can be customized by customer) |
| ECO15-50 | 50 A | |
| ECO15-60 | 60 A | |
| ECO15-70 | 70 A | |



Mechanical Dimensions in mm

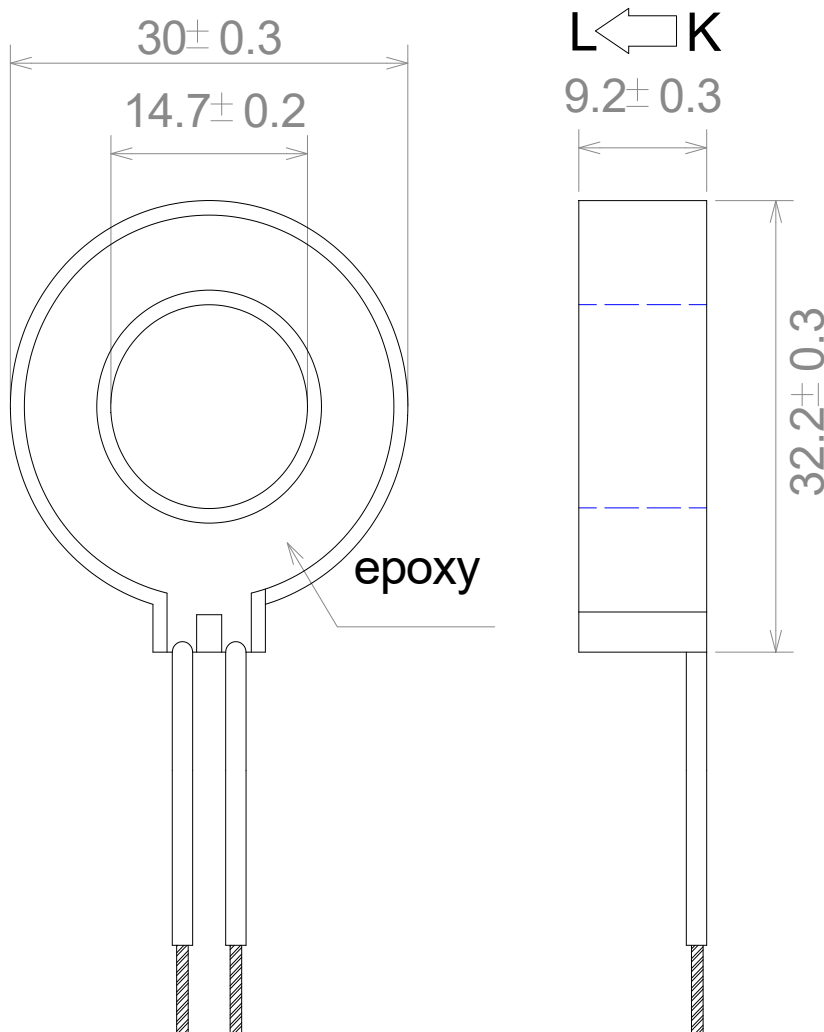

APPLICATIONS

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives

FEATURES

- 0.512" window opening (ID)
- Custom design Turns-Ratio available
- Rigid housing case with UL 94V-0 durable plastic
- 6ft black/white PVC wire leads—26~24AWG

- Approximate weight 25g

SPECIFICATIONS

- Standard Input Current 0.1-70A
- Frequency 50Hz — 400Hz
- Standard accuracy 0.2, 0.5,1
- Insulation Voltage 4000 Vac/1min
- Operating Temp. -40°C to +65°C
- Storage Temp. -45°C to +85 °C
- ANSI C57.13 and IEC61869-2 Standards

Connection Diagram

