


The ECO26 series are solid core energy monitoring current transformers. The CT is small size and low cost

Electrical Specifications

MODEL	INPUT CURRENT	AVAILABLE OUTPUT
ECO26-50	50 A	CURRENT OUTPUTS @ 40mA , 50mA, 100mA VOLTAGE OUTPUTS @ 0.25V, 0.333V, 0.5V, 1V, 2V (can be customized by customer)
ECO26-60	60 A	
ECO26-75	75 A	
ECO26-100	100 A	
ECO26-125	125 A	
ECO26-150	150 A	
ECO26-200	200 A	
ECO26-250	250 A	
ECO26-300	300 A	
ECO26-400	400 A	

Mechanical Dimensions in mm

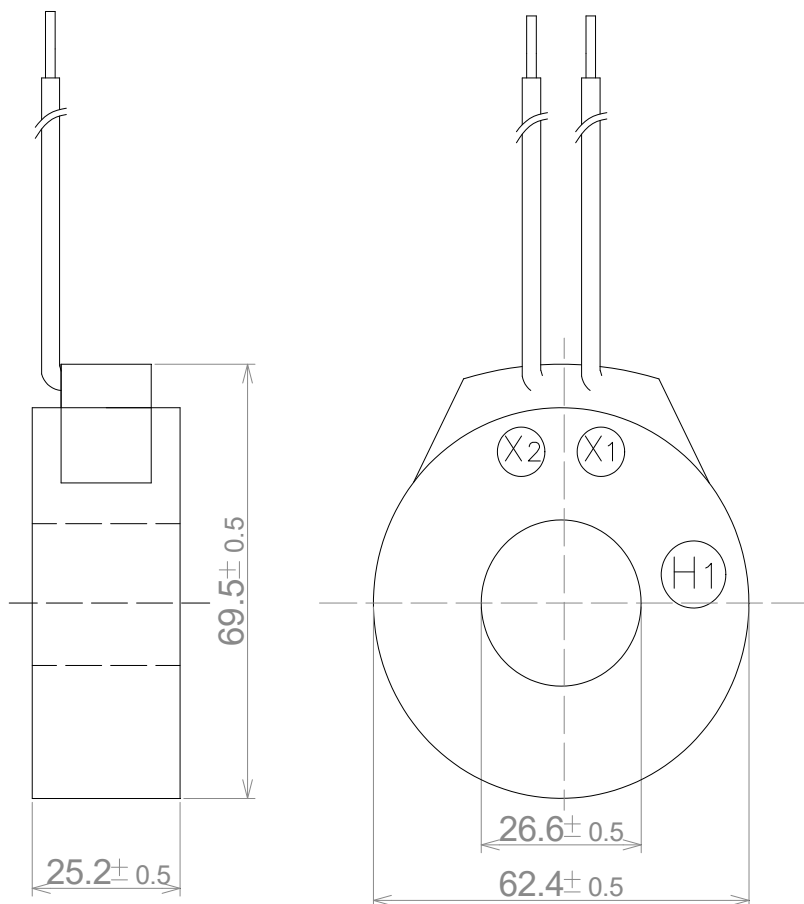

APPLICATIONS

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives

FEATURES

- 1.024" window opening (ID)
- Custom design Turns-Ratio available
- Rigid housing case with UL 94V-0 durable plastic
- PVC wire leads—16~18AWG
- Approximate weight 200g

SPECIFICATIONS

- Standard Input Current 0.1-400A
- Frequency 50Hz — 400Hz
- Standard accuracy 0.1, 0.2, 0.5, 1, 3
- Insulation Voltage 4000 Vac/1min
- Operating Temp. -40°C to +70°C
- Storage Temp. -45°C to +85°C
- IEC61010-1 and UL2808 Standards

Connection Diagram

